



# IR Series with Rings

# Return /Impact Industrial rollers

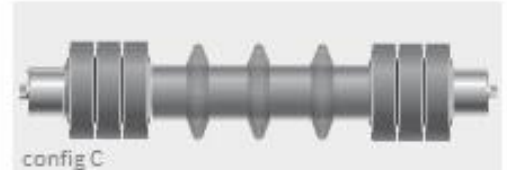

Heavy duty steel rollers, manufactured to suit the most hostile environments

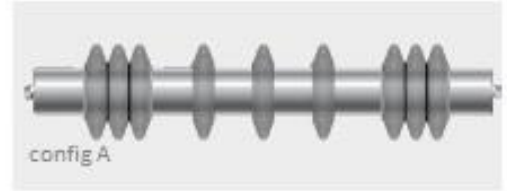


Config A Pointed rings spaced in the centrally – Medium Duty Plant

Config C Flat rings, positioned at the roller extremities, pointed rings spaced centrally - Medium/Heavy Duty Plant

Config B Flat rings on belt conveyors - Heavy Duty Plant

Roller Type	Roller Diameter & wall thickness	Axle Diameter	Bearing Type +External Seal	Load Capacity
IR60M108	Ø60 x 2.6	Ø20	6204 Precision +R20	365 kgF udl
IR63M133	Ø63.5 x 3	Ø20	6204 Precision +R20	365 kgF udl
IR89M133	Ø89 x 3	Ø20 & Ø25	6204 +R20 / 6305 +R25	565/650 kgF udl
IR89hd6M133	Ø89 x 5	Ø25	6305 Precision +R25	565/650 kgF udl

## IR Industrial Series

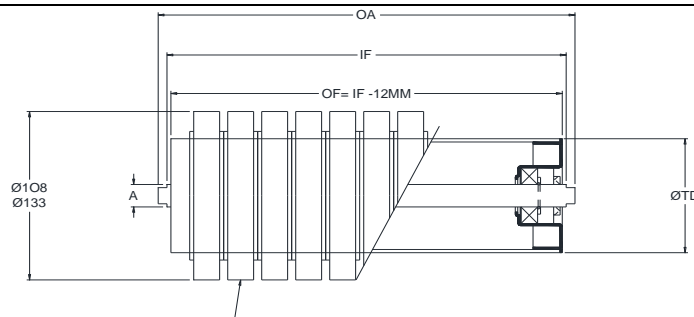

AX2 M/CD FLATS	AF, LG, A	AX2 DOUBLE OPEN FLATS
AX4 M/CD SLOTS	L, AF, A, LG	AX4 DOUBLE SLOT
AX5 MALE THREAD	L, A	AX5 -MALE THREAD AX6 -MALE THREAD ON REDUCED DIAMETER
AX12 INTERNALLY CAPTIVATED	L, A	AX12 PLAIN ENDS

Roller Type (ie IR89M133)

Axle length OA

Roller face/length OF

Axle Diameter A

Axle type & dimensions (ie AX2 14AF 16LG)

Quantity Required

Ring Configuration

Company Name and address:-

Signed.....Print.....

Date:

Purchase order No.:

Collect or Send by Carrier – circle as appropriate

Please sign & return Order