

# IR Series Extra heavy duty Steel Industrial rollers




These are heavy duty steel rollers, manufactured to suit the most hostile environments


Foundries | Trough Conveyors | Steel Mills | Off-Shore | Automotive | Air Cargo Industrial Mower

Roller Type	Roller Diameter & wall thickness	Axle Diameter	Bearing Type +External Seal	Load Capacity
IR60	Ø60 x 2.6	Ø20	6204 Precision +R20	365 kgF udl
IR63	Ø63.5 x 3	Ø20	6204 Precision +R20	365 kgF udl
IR70	Ø70 x 3	Ø20	6204 Precision +R20	440 kgF udl
IR76	Ø76 x 3	Ø20	6204 Precision +R20	450 kgF udl
IR76hd6	Ø76 x 5	Ø20	6204 Precision +R20	450 kgF udl
IR89	Ø89 x 3	Ø20 & Ø25	6204 +R20 / 6305 +R25	565/650 kgF udl
IR89hd6	Ø89 x 5	Ø25	6305 Precision +R25	565/650 kgF udl
IR4	Ø102 x 3	Ø20 & Ø25	6204 +R20 / 6305 +R25	565/650 kgF udl
IR4hd6	Ø102 x 5	Ø20 & Ø25	6204 +R20 / 6305 +R25	565/650 kgF udl
IR108	Ø108 x 3	Ø20 & Ø25	6204 +R20 / 6305 +R25	565/650 kgF udl
IR108hd6	Ø108 x 5	Ø20 & Ø25	6204 +R20 / 6305 +R25	565/650 kgF udl
IR5	Ø133 x 3.6	Ø25	6305 Precision +R25	650 kgF udl
IR6	Ø140 x 9	Ø25	6305 Precision +R25	650 kgF udl
IR7hd9	Ø159 x 9	Ø40	6308 Precision +R40	1005 kgF udl

## IR Industrial Series

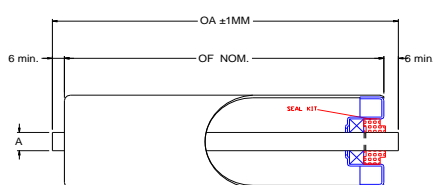

Roller Type (ie IR5)	IR76HD6
Axle length OA	1003MM
Roller face/length OF	914MM
Axle Diameter A	A=25
Axle type & dimensions (ie AX2 15AF 15LG)	AX3 DF= LF=
Quantity Required	36
NOTES: check dims & advise axle DF & LG on order	

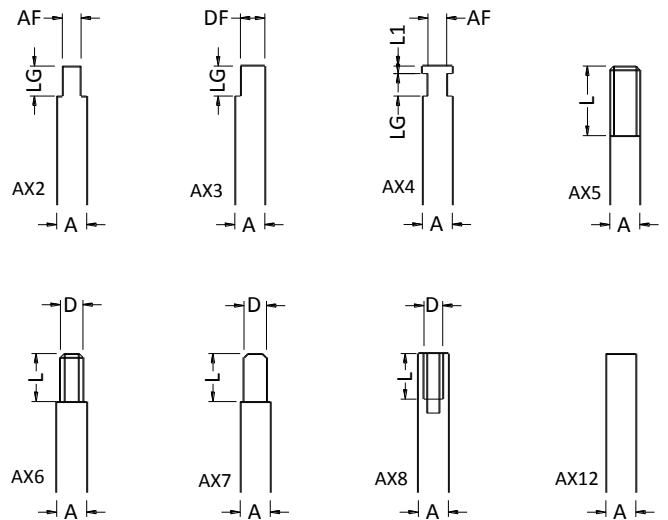

AX 2 = FLATTED  
AX 3 = D FLAT  
AX 4 = SLOTTED  
AX 5 = MALE THREAD

AX 6 = TURN DOWN & MALE THREAD  
AX 7 = TURNED DOWN  
AX 8 = FEMALE THREAD (D&T)  
AX 12 = PLAIN END (CAPTIVE)

Company Name and address:-

Signed.....Print.....

Date:

Purchase order No.:

Collect or Send by Carrier – circle as appropriate

Comments:

Please sign & return Order